

The Perfect Material
for a Perfect Tan

UV Retention

Chemical Resistance

Resistance to Yellowing



PLEXIGLAS®
BY ARKEMA

Plexiglas® G-UVT

CELL-CAST ACRYLIC SHEET

Salon owners want tanning beds that remain clean, sturdy, and clear throughout their lifetime, and Plexiglas® G-UVT cell-cast acrylic sheet is specifically designed with this in mind. Using proprietary technology, Plexiglas® G-UVT acrylic sheet has passed more than 10,000 hours of severe UVA and UVB weathering tests without significant change in UV transmission and clarity.

Plexiglas® G-UVT acrylic sheet is available in a patterned finish that hides light sources without sacrificing clarity. This Plexiglas® G-UVT P-95 acrylic sheet pattern creates a sleek, modern look while hiding fingerprints or smudges.

Typical applications include tanning beds, zoo exhibits, greenhouses, UV transmissive skylights, and HID (High Intensity Discharge) lamp covers.

- UV transmission starts just above 250 nm
- Excellent UV retention properties
- Resistant to yellowing over time
- Excellent craze and chemical resistance
- High thermal stability and mechanical properties
- Can be easily thermoformed

THICKNESS

0.118"
0.125"
0.150"
0.157"
0.170"
0.177"
0.187"
0.312"
0.354"
0.375"
0.472"
0.500"

SHEET SIZE*

48" X 96"
50" x 99"
60" x 96"
62" x 99"
72" x 96"
74" x 99"

*Custom lengths are available with minimum requirements.

Plexiglas® G-UVT

CELL-CAST ACRYLIC SHEET


TYPICAL STANDARD PROPERTIES

PROPERTIES	TEST METHOD	UNIT	VALUE
PHYSICAL			
Nominal Thickness for data unless otherwise noted		in	0.177"
Specific Gravity	ASTM D-792	---	1.19
Rockwell Hardness	ASTM D-785	M scale	101
OPTICAL			
Refractive Index (ND @ 73°F)	ASTM D-542	---	1.49
Luminous Transmittance ¹	ASTM D-1003	%	92.0
Ultraviolet Transmittance ² at 300 nm	ASTM D-1003	%	> 80.0
Haze ¹	ASTM D-1003	%	< 1.0
Yellowness Index ¹	ASTM E-313	---	< 1.0
Weathering performance after 3000 hours UVB-313EL exposure	ASTM G-154	---	---
Yellowness Index change	ASTM E-313	---	0.2
Haze change	ASTM D-1003	%	1.6
Mechanical			
Tensile Strength, maximum	ASTM D-638	psi	11,200
Tensile Strength, yield	ASTM D-638	psi	11,200
Tensile Elongation	ASTM D-638	%	4.6
Tensile Modulus of Elasticity	ASTM D-638	psi	450,000
Flexural Strength, maximum	ASTM D-790	psi	19,800
Flexural Modulus of Elasticity	ASTM D-790	psi	450,000
Notched Izod impact @ 73°F (23°C)	ASTM D-256	ft-lb / in	0.46
 THERMAL			
Deflection Temperature under Flexural Load @ 66psi – unannealed ¹	ASTM D-648	°F	225
Deflection Temperature under Flexural Load @ 264psi – unannealed ¹	ASTM D-648	°F	214
Vicat Softening Temperature – 1kg load	ASTM D-1525	°F	237
Vicat Softening Temperature – 5kg load	ASTM D-1525	°F	226
Coefficient of Thermal Expansion at 60°F	ASTM E-831	in / in / °F $\times 10^{-5}$	3.9
Maximum Recommended Continuous Service Temperature	N/A	°F	180 – 200
Recommended Thermoforming Temperature	N/A	°F	290 – 360
CRAZE RESISTANCE			
Constant Stress Craze Resistance, IPA ⁴	Modified ARTC Method – Mil P-6997	psi	2,100
Constant Stress Craze Resistance, Aromatic / Alcohol Blend ⁴	Modified ARTC Method – Mil P-6997	psi	1,700
FLAMMABILITY³ & SPECIFICATION COMPLIANCE			
Plastics Component – QMFZ2.E39437 - Flammability Classification	UL 94	---	94HB ($\geq 0.118"$)
Standard Specification for PMMA Acrylic Plastic Sheet	ASTM D-4802	---	Category A-1, Finish 1 or 2, Type UVT


Data given are average values and should not be used for specification purposes.

1. This property will change with thickness. The value given is for the thickness indicated in the column heading unless otherwise noted.
2. Tests performed on 0.125" thickness.
3. Flammability tests are small scale tests and may not be indicative of how materials will perform in an actual situation.
4. The values are after the material has been heated for forming.

Plexiglas® G-UVT Acrylic Sheet UV Transmission Curves

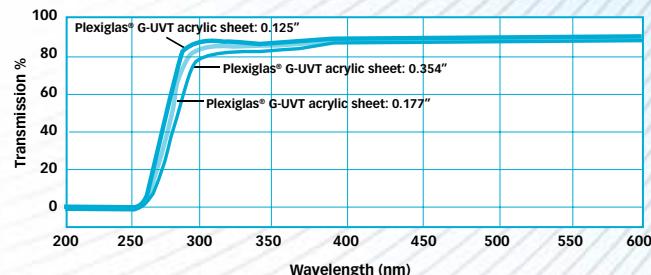

Edge Color Comparisons After UVB Exposure

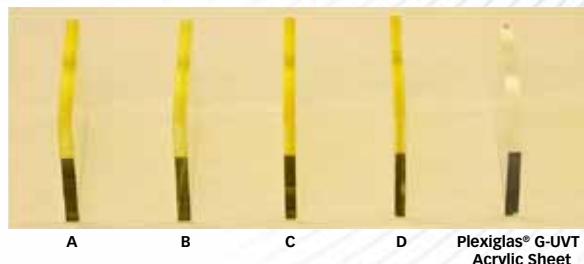


Edge color comparisons after UVB exposure (1200 hours). Plexiglas® G-UVT acrylic sheet showed no color change, and the competitive UVT sheets showed severe yellowness after UVB lamp exposure. Samples A, B, C, and D are various commercial UVT type samples.

Reference test method: ASTM G-154

Conditions: Q-Panel Accelerated Weathering Tester, model QUV/SE, with UVB 313EL lamps. The set point for the tester is 0.67w/m² at the calibration wavelength $\lambda=313$ nm. Set temperature: 45°C.

Comparison of Plexiglas® G-UVT Acrylic Sheet vs. Commercial UVT Samples

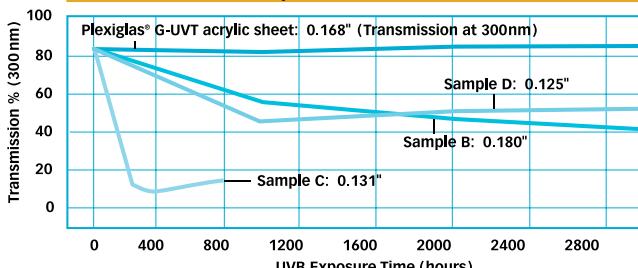

UV transmission at 300nm for Plexiglas® G-UVT acrylic sheet and various commercial UVT type samples as a function of UVB exposure time.

Reference test method: ASTM G-154

Distributed by:

 **Piedmont Plastics®**
where solutions take shape

Toll Free: 1.800.277.7898
www.piedmontplastics.com

Plexiglas® acrylic plastic is a combustible thermoplastic. Observe fire precautions appropriate for comparable forms of wood and paper. For building uses, check code approvals. Impact resistance is a factor of thickness. Avoid exposure to heat or aromatic solvents. Clean with soap and water. Avoid abrasives.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations.

Altuglas® and Plexiglas® are registered trademarks of Arkema.

©2013 Arkema Inc. All rights reserved.