

JESSUP Floor2WallPro®

*54" One-Step Printable Media
for Floor-to-Wall Graphics*

Floor2WallPro® is a 54" one-step printable media designed to go wherever your graphics need to perform—floors, walls, and everything in between. This fabric-reinforced, non-slip PVC delivers outstanding durability, vibrant print quality, and reliable adhesion across a wide range of surfaces. Easy to install, reposition, and remove with little to no residue, Floor2WallPro® simplifies installation while maintaining a professional finish in high-traffic environments.




Holds up under
foot traffic


Slip-resistant
surface for
pedestrian safety



No overlaminate
needed



Fabric-reinforced
for dimensional
stability




High white
point for
bold, vibrant
graphics

Indoor and
short-term
outdoor use



Easy to clean
surface

Easy to apply
and remove with
minimal residue




Distributed by



Piedmont Plastics®

JESSUP®
Adhesive Coated Films

JESSUP Floor2WallPro®

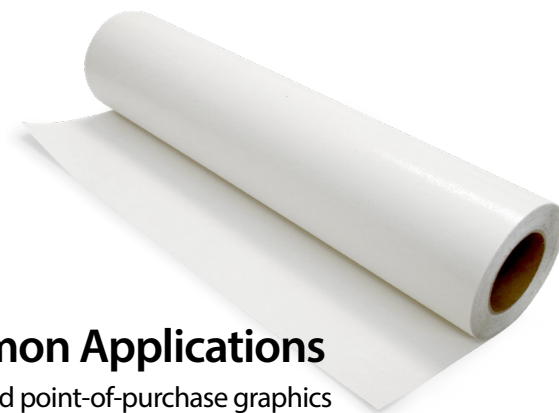

Key Benefits

- One-step printable—no overlaminate needed
- Easy install, reposition, and clean removal
- For floors, walls, and short-term indoor/outdoor use
- Adheres to carpet, drywall, and concrete
- Fabric-reinforced for stability
- Bright white for vibrant graphics

Common Applications

- Retail and point-of-purchase graphics
- Floor advertising and promotional messaging
- Wall murals and branded environments
- Event and directional signage
- Temporary campaigns across mixed surfaces

PROPERTIES

Physical Properties	Test Methods	Average Results
Thickness	PSTC – 133 - Substrate - Pressure Sensitive adhesive - Release Liner	0.0175 inch (0.445 mm) 0.0020 inch (0.051 mm) 0.0065 inch (0.165 mm)
Peel Adhesion to:	PSTC – 101	
- Stainless Steel	15-minute dwell 24-hour dwell	15 oz/in (16 N/100 mm) 20 oz/in (22 N/100 mm)
- Powder coated surfaces *	15-minute dwell 24-hour dwell	15 oz/in (16 N/100 mm) 20 oz/in (22 N/100 mm)
- Polyethylene	15-minute dwell 24-hour dwell	15 oz/in (16 N/100 mm) 15 oz/in (16 N/100 mm)
Shear Adhesion to:	PSTC – 107	
- Stainless Steel	1/2" x 1/2" x 1000g	< 1 hours
Tack	PSTC - 6 Rolling Ball Tack	< 5 inches
Adhesive Temperature Range		
- Application Temperature		<-10°F
- Operating Temperature		-20 - 375°F



Distributed by —————
 **Piedmont Plastics®**

 **JESSUP®**
Adhesive Coated Films
JMC-MKT-FL2WP