



Pronto™ Changeable Copy

Gemini Pronto Changeable Copy are a cut above traditional saw-cut changeable copy. That's because Pronto letters are made from an injection molded precision blank. Each panel is molded with a small raised edge on the back side of the letter that prevents the screen-printed ink from being scratched off as the letters are moved in and out of the Pronto track. The molded-in feet keep debris (and in cooler climates, ice) from interfering with the placement of the changeable copy message. Finally, because the inks used on the Pronto letters are UV inks (no VOCs!), there are no harmful emissions during the manufacturing process. Pronto letters truly are the letters of choice.



Important Note:

To order, you need both
Letter Height and **Panel Height**

Distributed by:



Toll Free: 1.800.277.7898
www.piedmontplastics.com

NOTE: Pronto letters enclosed in a sealed vandal proof cover require venting, or warping may occur.

Pronto™ Styles

MODERN

ABCDEFGHIJKLMNOPQRSTUVWXYZ ,,:- &
1234567890

Letter Height	Panel Height	Avg. Panel Width	Black	Red	White
3"	3 7/8"	2 3/8"			
4	4 7/8	3			
6	6 7/8	4			
8 on 9	8 7/8	5 1/2			na
8	9 7/8	5 1/2			
10	11 7/8	6 3/4			na

Punctuation set available:

¢\$?!'"" ¼ ½ % + # () / @ ★ * = →

AD

ABCDEFGHIJKLMNOPQRSTUVWXYZ
1234567890

Letter Height	Panel Height	Avg. Panel Width	Black	Red	White
4"	4 7/8"	3 1/2"			
6	6 7/8	4 5/8			
8	9 7/8	6 3/4			

Punctuation set available:

,,:- & ¢\$?!'"" %

I = In stock

ADM

ABCDEFGHIJKLMNOPQRSTUVWXYZ ,,:- &
1234567890

Letter Height	Panel Height	Avg. Panel Width	Black	Red	White
4"	4 7/8"	3 1/2"			
6	6 7/8	4 5/8			
8 on 9	8 7/8	6 3/4			na
8	9 7/8	6 3/4			
10	11 7/8	7 1/2			na

Punctuation set available:

¢\$?!'"" ¼ ½ + # # () % / @ ★ * = →

CONDENSED

ABCDEFGHIJKLMNOPQRSTUVWXYZ ,,:- &
1234567890

Letter Height	Panel Height	Avg. Panel Width	Black	Red	White
4"	4 7/8"	2 3/8"			
6	6 7/8	3 1/4			
8 on 9	8 7/8	4 7/8			na
8	9 7/8	4 3/8			
10	11 7/8	5 1/2			na

Punctuation set available:

¢\$?!'"" ¼ ½ + # # () % / @ ★ * = →

Distributed by:

 **Piedmont Plastics®**
where solutions take shape

Toll Free: 1.800.277.7898
www.piedmontplastics.com

Pronto Letter Set

Pronto Commercial Set (Letters & Numbers Only)

**ABCDEFGHIJKLMNOPQRSTUVWXYZ
I234567890**

EACH	100
E	7
A I	6
O U	5
L N R S T P	4
F G H M	3
B C D	3
J K V W Y Z	2
Q X \$ ¢	1
0 1 2 3 4 5 6 7 8 9	1

Español Character Sets

SET OF 49	
Á É Í Ó Ú Ñ	7 each

Available in 4", 6" & 8" Black or Red Only. Not available in MoonGlo.
Closest to our Condensed style.

PRONTO Theater Rating Symbols

	G R	PG	PG-13	NC-17
6"				
8				
10				

Pronto Punctuation Set

.,: - & ¢ \$? ! ' " " ¼ ½ + # () % / @

EACH		50
Ampersand	&	2
Period	.	2
Comma	,	2
Exclamation	!	2
Dash	–	2
Question	?	2
Colon	:	2
Semi Colon	;	2
Left Quote	"	2
Right Quote	"	2
Apostrophe	'	2
Slash*	/	2
Dollar Sign	\$	2
Cent Sign	¢	2
Percent	%	1
One Half*	1/2	2
One Quarter*	1/4	2
Plus*	+	1
Left Parenthesis*	(2
Right Parenthesis*)	2
At Sign	@	2
Hashtag	#	2
Facebook	f	2
Linkedin	in	2
Twitter		2
.com	.com	2

*Not available in AD font. Will ship ADM


Distributed by:



Toll Free: 1.800.277.7898
www.piedmontplastics.com

Pronto™ Track Installation

Accurate spacing is the key to a good Pronto changeable letter system. Refer to the diagram shown here to select the method of track installation you prefer and determine the total height of your sign. The use of dual track automatically spaces the rows and reduces the number of track pieces required. If row spacing needs to be greater use a combination of top and bottom tracks.

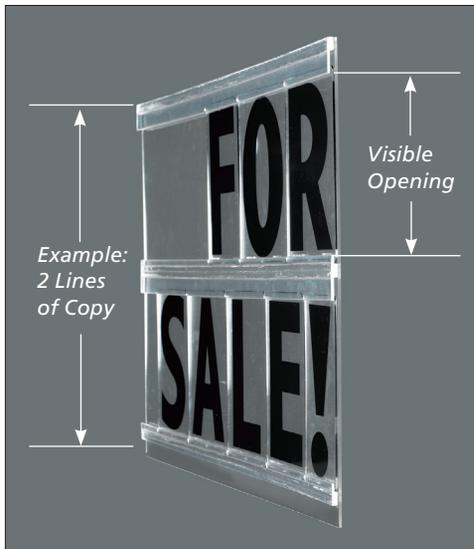

Expansion

If the surface you are attaching the Pronto Track onto will expand and contract at somewhat the same rate as the plastic track, installation can be done using either rivets or adhesive. Using a chalk line and level, mark the location for your first piece of track.


For a rivet installation: drill a hole through the track and background (maximum 8" center to center). To fasten track to 1/8" - 3/16" background, drill .1875 diameter hole (3/16" drill bit). Insert the Pronto rivet, then push the pin to its closed position.

For an adhesive installation: Using a syringe or bottle applicator with a thin needle tip, apply a steady line of adhesive, such as WELD-ON #3 or #4, to the back face of the track. Tape in place until adhesive has set up completely.

Non-expansion

If the surface you are attaching Pronto Track onto will not expand or contract (ie. wood or metal) at the same rate as the plastic track, we recommend the following installation procedure:

- Drill or route horizontal oblong or oversized holes in the track.
- Using a sheet metal screw, because of its squared shoulder; put the screw in the center of the horizontal hole.
- Do not tighten the screw. Leave it approximately 1/4 to 1/2 turn loose.
- When all the screws are in the track you should be able to wiggle horizontally a small distance.
- Now the track is able to expand or contract with temperature changes, and shouldn't buckle, crack or warp.

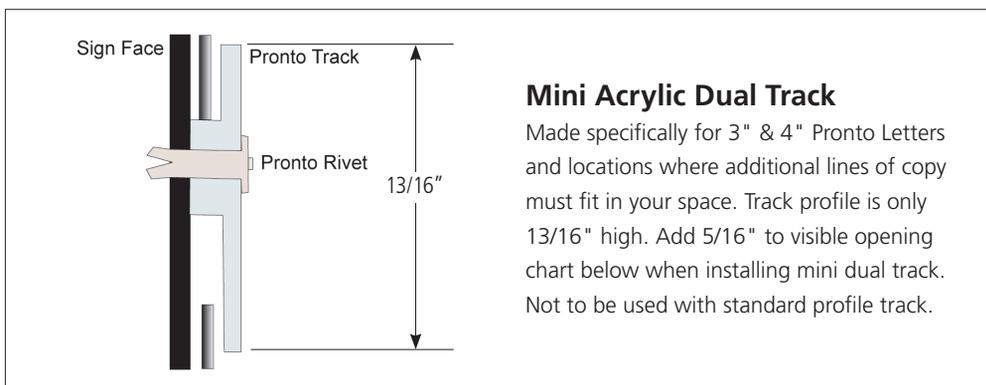

Mini Acrylic Dual Track

Made specifically for 3" & 4" Pronto Letters and locations where additional lines of copy must fit in your space. Track profile is only 13/16" high. Add 5/16" to visible opening chart below when installing mini dual track. Not to be used with standard profile track.

Mini Pronto Track Charts

Lines of Copy	TOP TO BOTTOM HEIGHT	
	3" Letter	4" Letter
1	5.18"	6.18"
2	9.56"	11.55"
3	13.93"	16.93"
4	18.30"	22.29"
5	22.7"	27.66"

VISIBLE OPENING	
3" Letter	4" Letter
3.56"	4.56"

Distributed by:



Toll Free: 1.800.277.7898
www.piedmontplastics.com