

SCS1200 Construction silicone glazing sealant

Product Description

SCS1200 Construction silicone glazing sealant is a one-component, high strength, acetoxy silicone adhesive for structural, butt joint and general purpose glazing applications. The material is supplied as a paste, which cures into a durable rubber when exposed to atmospheric moisture.

Typical Performance Properties

- **Silicone Durability** - Cured silicone provides excellent long-term resistance to natural weathering, humidity and high & low temperatures with negligible change in elasticity.
- **Fast Cure Time** - Fast cure technology minimizes tack free and cure times (compared to other sealant chemistries).
- **Primerless Adhesion** - Bonds to many conventional substrates and finishes including glass, glass coatings, ceramic frits, fluoropolymer and powder coated paints, conversion coatings and anodized aluminum (Momentive recommends testing of all substrates for primerless adhesion).
- **High Tensile Strength** - Increases safety margins in SSG designs.
- **±25% Movement Capacity** - Can accommodate 25% movement in both extension and compression and has excellent recovery after cycling.
- **Stable Consistency (uncured)** - Supplied as a lightweight paste, the consistency of which remains relatively unchanged over a wide temperature range. The paste can be easily gunned and toolled under hot or cold conditions.
- **Cured Thermal Stability** - Once cured, the material remains fully elastic over a temperature range of -55°F (-48°C) to 400°F (204°C).
- **Low Sag or Slump** - Improved gunning and tooling into horizontal, vertical or overhead surfaces.

Momentive Performance Materials is an exclusive licensee of General Electric. Momentive Performance Materials provides versatile materials as the starting point for its creative approach to ideas that help enable new developments across hundreds of industrial and consumer applications.

We are helping customers solve product, process, and performance problems; our silanes, fluids, elastomers, sealants, resins, adhesives, urethane additives, and other specialty products are delivering innovation in everything from car engines to biomedical

devices. From helping to develop safer tires and keeping electronics cooler, to improving the feel of lipstick and ensuring the reliability of adhesives, our technologies and enabling solutions are at the frontline of innovation.



Exclusive
Licensee

Distributed by:

 **Piedmont Plastics**[®]
where solutions take shape

Toll Free: 1.800.277.7898
www.piedmontplastics.com

SCS1200 Construction silicone glazing sealant

Basic Uses

- SCS1200 Construction silicone glazing sealant is a candidate for use in structural glazing applications.
- SCS1200 may be used as a weatherseal product for general purpose glazing, butt glazing and for tall glass-stiffened lobby systems.
- SCS1200 has been successfully tested in protective glazing applications and may be considered a candidate for such applications.
- SCS1200 may be considered for sealing air conditioning, vents or other wall penetrations; glass block, metal/plastic signs or marine hardware.



Packaging

SCS1200 is available in 10.1 fl. oz. (299 ml) plastic caulking cartridges with either removable or fixed nozzles. Cases contain 24 cartridges. Bulk packaging is available upon request.

Color

SCS1200 is available in 4 standard colors plus translucent:

Grade	Color
SCS1201	Translucent
SCS1202	White
SCS1203	Black
SCS1209	Aluminum (metallic)
SCS1297	Bronze

Limitations

SCS1200 should not be used, applied or is not recommended:

- In structural glazing applications unless Momentive Performance Materials has reviewed shop drawings for applicability and has performed adhesion and compatibility tests on project substrates, spacer materials and all accompanying accessories. Review and testing is done on a project-by-project basis. No blanket approval is given by Momentive Performance Materials for structural glazing applications. Structural glazing industry guidelines (ASTM C 1401) suggest that drawings and details are to be reviewed by all parties involved in the manufacture of an SSG system and for each building project.
- For use on mirrors.
- For use on wet, damp, frozen or contaminated surfaces.
- For use on masonry, stone, marble, lead, zinc coated metal, bare metal or surfaces subject to corrosion.
- For use as the structural adhesive when bonding some IG unit types. Contact Momentive technical services for guidance.
- Under exceedingly hot or cold conditions (see Sealant Application section for more information).
- For horizontal decks, patio, driveway or terrace joints where abrasion or physical abuse is encountered.
- When paintability is desired, consider SCS7000 Paintable weathersealant.
- Contact Momentive technical services for applications where sealant is used underwater or in continuous contact with water.

SCS1200 Construction silicone glazing sealant

Limitations (continued)

Precautions

- This material requires atmospheric moisture to cure from paste to rubber and may not attain its listed final cured properties when used in designs or applications where silicone is encapsulated and without access to atmospheric moisture.
- Some materials that bleed plasticizers or oils can cause a discoloration on the surface of sealants. When sealing to or over items such as rubberized gaskets, bituminous-based materials, butyl or oil-based products, oily woods, tapes, etc., Momentive Performance Materials recommends that compatibility testing be performed prior to use to confirm the suitability of the use of these materials when in contact with each other.

Typical Properties – Supplied

Property	Value ⁽¹⁾	Test Method
Consistency	Paste	
Polymer	100% Silicone	
VOC	23 g/l	WPSTM C1454
Work Life (tooling time)	5-10 minutes	
Tack Free Time	30 minutes (@ 75°F, 50% RH)	ASTM C 679
Sag/Slump	0.1" max.	ASTM D 2202

Typical Properties – Cured

Property	Value ⁽¹⁾	Test Method
Hardness, Durometer (Type A Indentor)	28	ASTM D 2240
Ultimate Tensile Strength	480 psi (3.31 Mpa)	ASTM D 412
Ultimate Elongation	513%	ASTM D 412
Tear Strength	45.2 ppi	ASTM D 642
Shear Strength (@ 1/4" thickness)	110.8 psi (0.76 Mpa)	ASTM C 961
Peel Strength (average) (21 day cure @ 75°F, 50% RH)	61 ppi	ASTM C 794
Joint Movement Capability	±25%	ASTM C 719
Service Temperature Range	-55°F to +400°F (-48°C to 204°C)	
Weathering and UV Resistance	Excellent	Momentive/GE 20 yr. study
Cure Time	24 hours (1/4" or 6 mm deep section @ 75°F, 50% RH)	
Full Cure (common applications)	5-7 days	

(1) Average value. Actual value may vary.

SCS1200 Construction silicone glazing sealant

Applicable Standards

SCS1200 Construction silicone glazing sealant meets the requirements of the following specifications:

ASTM: C 1184; C 920, Type S, Class 25, Use G and A

US FEDERAL SPECIFICATIONS: TT-S-001543A & TT-S-00230C

USDA: Momentive Performance Materials has on file documentation from USDA which states that SCS1201, SCS1202, SCS1203, SCS1209 and SCS1297 Construction comply with 21 CFR 177.2600 "Rubber Articles Intended For Repeated Use" and are chemically acceptable for use on surfaces in official establishments operating under the Federal Meat and Poultry Inspection Program. For further information, contact Momentive Product Regulatory Compliance. The final granting of authorization for the proposed use of such compounds is the responsibility of the inspector in charge of the official plant. Technical assistance will be provided by the Product Safety Branch of USDA upon request.

FDA: SCS1201, SCS1202 and SCS1203 Construction may be used in food contact applications for repeated use under FDA Regulation 21 CFR 175.105 "Adhesives" and 175.300 "Resinous and Polymeric Coatings". SCS1209 Construction may be used in food applications for repeated use under FDA Regulation 21 CFR 175.300 "Resinous and Polymeric Coatings".

The use of these adhesive sealants is subject to the following conditions:

- The adhesive sealant is applied in accordance with Good Manufacturing Practice at a thickness not to exceed 6mm (1/4 inch) from an exposed edge.
- As a continuous film between joints acting as a functional barrier between the food and the substrate (area underneath the joint).
- The adhesive sealant must be cured for a minimum of 14 days at 25°C (77°F) and 50% Relative Humidity.
- The operating temperature of the adhesive sealant after cure must not exceed 400°F (204°C).

The above sealants mentioned should be evaluated to determine bond strength for each specific substrate and application. If enhanced adhesion is desired, the evaluation of SS4179 primer is recommended. Only SS4179 primer may be used in repeated contact with food under 21 CFR 175.300 "Resinous and Polymeric Coatings".

NSF: SCS1201, SCS1202, SCS1203, SCS1209 and SCS1297 Construction are listed under NSF International Standard No. F-51 "Plastic Materials and Components for use in Food Equipment" as satisfactory for use on food contact surfaces, temperatures not to exceed 400°F (204°C).

Fire Hazard Classification: SCS1200 has been tested according to Underwriters Laboratories, Inc. UL723-79 "Test Surface Burning Characteristics". Contact Momentive Technical Services for test results.

Joint Designs and Dimensions

Silicone contact width and thickness (see Figure 1) will vary by project with the design wind load and glass size. Contact width can be calculated using the following formula: [Design Wind Load (PSF) x Longest Short Span of Glass or Panel (Ft.)] divided by 480. A minimum sealant thickness of 1/4" (6mm) between substrates is required to accommodate thermal expansion and contraction (see Figure 2) of most systems and should be used in order to assure that sealant can be injected into the structural cavity obtaining full contact with both the glass and metal surfaces while remaining free of air voids. Greater joint thickness may be required to accommodate movement in some larger-sized SSG systems. Momentive Performance Materials can be contacted to assist in determination of proper joint thickness to accommodate expected movement in structurally glazed applications.

Figure 1:


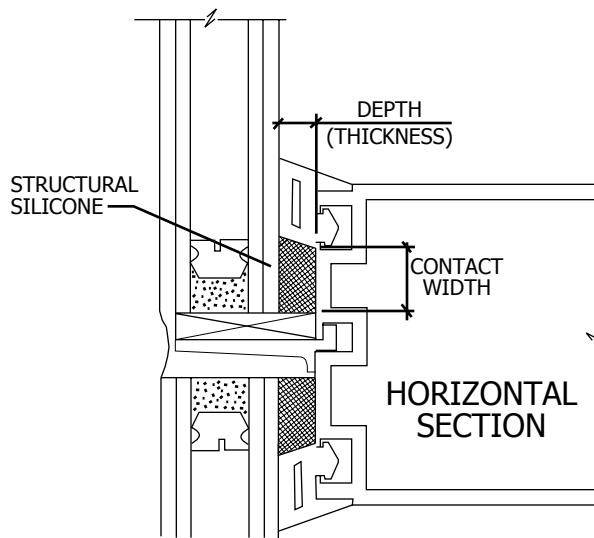


Figure 2: Movement from thermal expansion and contraction and/or glass rotation.

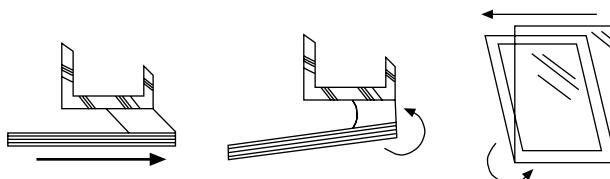

Joint Designs and Dimensions (continued)

The following materials are required to be submitted to Momentive Performance Materials to receive suggestions for the use of SCS1200 Construction silicone glazing sealant.

- Architectural and shop drawings for review and comment.
- Design wind load requirement(s) for project.
- Glass or panel sizes.
- Production samples of metal, glass, gaskets, spacers and setting blocks with type and manufacturer identified.
- Specification and/or identification of paint or finish to which SCS1200 is intended to adhere (*i.e.*, 215-R1 anodized or if paint; manufacturer, finish system and ID#).

Momentive Performance Materials will provide the following, after reviewing the materials above:

- Determination as to whether the submitted joint dimensions meet the minimum design criteria necessary for the use of SCS1200.
- Short-term adhesion data using (typically) the ASTM C 794 and/or ASTM C 1135 test method. Other test methods may be employed.
- Short-term compatibility test results on gaskets, spacers and setting blocks and other accessories per ASTM C 1087 or Momentive Performance Materials test method for compatibility.
- Information regarding suggested primers, when required.

Momentive Performance Materials will not:

- Design sealant joints.
- Provide comments on the structural integrity of overall framing system(s).

The design professional has final responsibility for the determination of structural sealant joint dimensions based on project conditions, design wind load(s), glass or panel sizes, anticipated thermal, seismic or other movement of the system.

The ASTM C1401 Standard Guide for Structural Sealant Glazing provides a thorough overview of design topics and information for use in SSG systems.

Installation

Surface Preparation

Sealants may not adhere or maintain long-term adhesion to substrates if the surface is not prepared and cleaned properly before sealant application. Using proper materials and following prescribed surface preparation and cleaning procedures is vital for sealant adhesion. Momentive Performance Materials can provide quality control information and suggestions to user upon request.

Materials

- Use clean, fresh solvent as recommended by the sealant manufacturer's test report. When handling solvents, refer to manufacturer's MSDS for information on handling, safety and personal protective equipment. Isopropyl Alcohol (IPA) is commonly used and has proven useful for most substrates encountered in SSG systems. Xylene and Toluene have also been found useful on many substrates.
- Use clean, white cloths free of lint or other lint-free wiping materials.
- Use a clean, narrow-blade putty knife when tooling structural silicone into the cavity.
- Use primer when required.

Cleaning Procedures

- Remove all loose material (such as dirt and dust), plus any oil, frost or other contaminants from the substrates to which the structural silicone will be adhered.
- Do not use detergent to clean the substrate as residue may be left on the surface.
- Clean the substrates receiving the sealant as follows: Using a two-rag wipe technique. Wet one rag with solvent and wipe the surface with it, then use the second rag to wipe the wet solvent from the surface BEFORE it evaporates. Allowing solvent to dry on the surface without wiping with a second cloth can negate the entire cleaning procedure because the contaminants may be re-deposited as the solvent dries.
- Change the cleaning rags frequently, as they become dirty. It is easier to see the soiling if white rags are used. Do not dip used wipe cloths into solvent as this can contaminate the solvent. Cleaning with contaminated solvent can result in sealant adhesion issues. Always use clean containers for solvent use and for solvent storage.
- When cleaning deep, narrow joints, wrap the cleaning cloth around a clean, narrow-blade putty knife. This permits force to be applied to the cleaned surface.
- Clean only as much area as can be sealed in one hour. If cleaned areas are again exposed to rain or contaminants, the surface must be cleaned again.

SCS1200 Construction silicone glazing sealant

Installation (continued)

Primers

SCS1200 Construction silicone glazing sealant will bond to many clean surfaces without the aid of a primer. For difficult-to-bond substrates, the use of a primer or special surface preparation should be evaluated. An evaluation should be made for each specific application/substrate to determine quality of bond. When properly used, primers help assure strong and consistent sealant adhesion to surfaces that may be difficult to bond. Most primers are a blend of organic and inorganic chemicals, resins and solvents. NEVER APPLY PRIMER TO GLASS SURFACES. Obtaining the proper materials, as well as following the prescribed procedures, is vital to ensure the successful use of primers. PRIMER APPLICATION IS NOT A SUBSTITUTE FOR SURFACE PREPARATION. Consult Momentive Performance Materials primer datasheet(s) for specifics and recommendations for use.

CAUTION

Primers may contain solvents. When handling solvents, refer to manufacturer's MSDS for information on handling, safety and personal protective equipment.

Masking

- To simplify clean up of excess sealant, use easy to release, pressure sensitive tape to mask adjacent surfaces before applying the structural silicone sealant.
- Start from the top down and overlap the runs. Tool in direction of over-lap so that masking is not disturbed during tooling.
- Remove masking immediately after application of silicone or as soon as possible or practical.
- Drop cloths can be used to cover any surfaces likely to collect excess sealant removed during tooling operations.

Sealant Application

- Apply the sealant by pushing the bead ahead of the nozzle and making sure that the entire cavity or joint is filled. Tooling should be done neatly, forcing the sealant into contact with the sides of the joint, thus helping to eliminate any internal voids and assuring good substrate contact.
- Sealant application is not recommended when the temperature is below 40°F (4°C) or if frost or moisture is present on the surfaces to be sealed.
- SCS1200 works best when applied to surfaces below 122°F (50°C).
- Due to the smooth consistency of SCS1200, tooling agents such as water, soap or detergent solutions are not necessary or recommended. Dry tooling is recommended.
- SCS1200 should not be applied in totally confined spaces since the sealant requires exposure to air to cure properly and develop typical properties. In a typical SSG cavity, cure depths up to 3/4" from an air interface will generally cure satisfactorily and reach maximum properties within several days. Cure depths > 3/4" may take significantly longer time to cure and when applied in a single application may not cure satisfactorily. Consult Momentive Performance Materials technical services for additional information on depth of cure for this product.

Method of Application

SCS1200 is easily dispensed directly from cartridges using standard caulking guns or air operated guns. Maximum recommended pressure for air operated guns is 45 psig (3.2 kgs/cm²). Mixing, heating and refrigeration are not required.

Storage Conditions

SCS1200 should be stored in the original unopened container at or below 80°F (27°C).

Availability

For ordering information or to find an authorized distributor nearest you, please contact customer service at 877-943-7325 or visit our website www.momentive.com.

Government Requirement

Prior to considering use of a Momentive Performance Materials product in fulfilling any government requirement, please contact the Government and Trade Compliance office at: 413-448-4624.

SCS1200 Construction silicone glazing sealant

Patent Status

Technical subject matter in this publication is described and protected by one or more pending US patent applications and foreign counterparts.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.ge.com/sealants or, upon request, from any Momentive Performance Material representative. Use of other materials in conjunction with Momentive Performance Materials sealants products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC), Transport Canada (CANUTEC), and the Chemical Emergency Agency Service also maintain an around-the-clock emergency service for all chemical products:

Location	GE Branded Products	All Chemical Products
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CANUTEC: 613.996.6666 (collect) or CHEMTREC: 800.424.9300
Europe, Middle East, Africa	+32.(0)14.58.45.45 (Belgium)	CHEMTREC: +1-703.527.3887 (collect)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials ¹ at 518.233.2500	CHEMTREC: 800.424.9300

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*Tosseal and Tosprime are trademarks of Momentive Performance Materials Inc.

GE is a registered trademark of General Electric.

Momentive and M-design logo are trademarks of Momentive Performance Materials Inc.

Copyright 2008 Momentive Performance Materials Inc. All rights reserved.