

**Ino-Steel™**

MANUFACTURER NEWLIFE MAGNETICS

PRINTABLE FLEXIBLE MAGNETIC RECEPTIVE SHEETING

MACO® | Wall-Mag™ | Digital Magnet | Hi-Force Magnet | EZ-Film™ Steel | EZ-Film™ Mag

Newlife's **MACO®** magnetic system is widely used in POP and sign display industrials, which is composed by high quality steel sheeting **Ino-Steel™** and magnetic base **Wall-Mag™**. Once installed the magnetic base, it can be used for a long time and easy to change. Our wide-format **Ino-Steel™** are ideal for POP displays. This material is non-magnetic and can be installed quickly, removed, exchanged, re-installed, and stacked on **Wall-Mag™** 1 to 4 layers thick to create a message that can be added to, changed, or removed easily. Our printable magnetic receptive materials are suitable for UV, eco-solvent, solvent, and latex inks etc.



SPECIFICATION


PART NO.	DESCRIPTION & SUPERIORITY	MAGNETIC CONDUCTION	PRINTABILITY	LENGTH x WIDTH
NS-UV-WT010	10mil with higher magnetic conduction than others. Steel sheeting laminated with semi-matt white PET (polyester film), UV curable and Latex suitable	≥10.4Lbs. pull/ft2 (≥5g/cm ²)	UV L	100ft x 50" 100ft x 54" 100ft x 60"
NS-SOL-WT010	10mil with higher magnetic conduction. Steel sheeting laminated with semi-matt white PET (polyester film), good for eco-solvent and eco-solvent printer.	≥10.4Lbs. pull/ft2 (≥5g/cm ²)	S ES LS UV profile dependent	100ft x 50" 100ft x 54" 100ft x 60"
NS-P012	12mil with higher magnetic conduction. Steel sheeting laminated with matt white PP (polypropylene film).	≥10.4Lbs. pull/ft2 (≥5g/cm ²)	UV L	100ft x 50" 100ft x 54" 100ft x 60"
NS-ART013	13mil, Steel sheeting laminated with semi-matt paper, the most economical solution	≥10.4Lbs. pull/ft2 (≥5g/cm ²)	UV L LS OF FL	100ft x 50" 100ft x 54" 100ft x 60"



WIDER, THINNER, LIGHTER

Width ranges from 24" to 60".

Standard thickness is 10~13 mil.

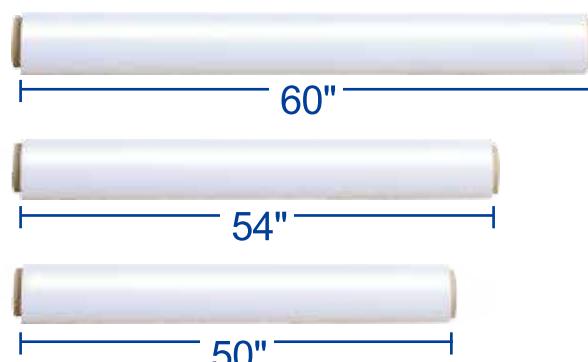

DIRECT PRINTING SOLUTION

Magnetic printable media for solvent, eco-solvent, UV, offset and flexo print.

High resolution printing performance.





MANUFACTURER NEWLIFE MAGNETICS PRINTABLE FLEXIBLE MAGNETIC RECEPTIVE SHEETING


MACO MAGNETICS DISPLAY SYSTEM - *Ino-Steel*TM + *Wall-Mag*TM



***Ino-Steel*TM** is steel sheeting laminated with high quantity printable media which has excellent magnetic receptive ability. It can be applied with magnetic surface ***Wall-Mag*TM**


INSTALLATION ON STEEL SURFACE :

Stick ***Wall-Mag*TM** 2 Sides mag on a steel surface first then stick printed ***Ino-Steel*TM** directly on magnet.

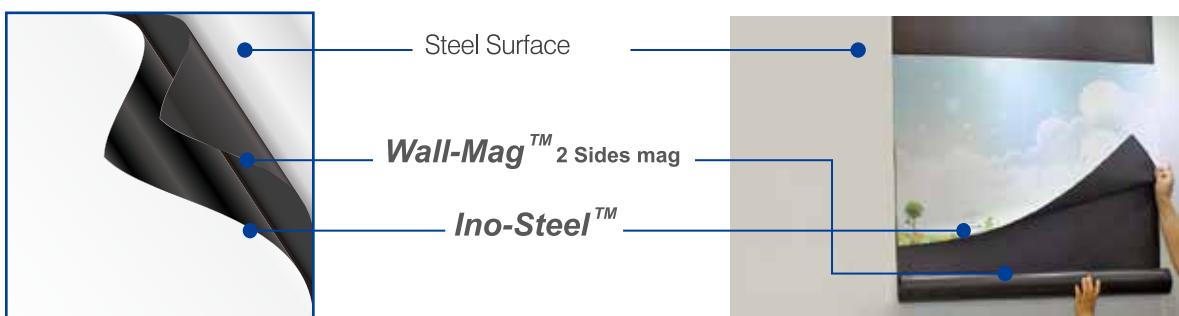

INSTALLATION ON NON-STEEL SMOOTH SURFACE :

For non-steel smooth surface, install ***Wall-Mag*TM** Adhesive first then stick printed ***Ino-Steel*TM** directly on magnet.

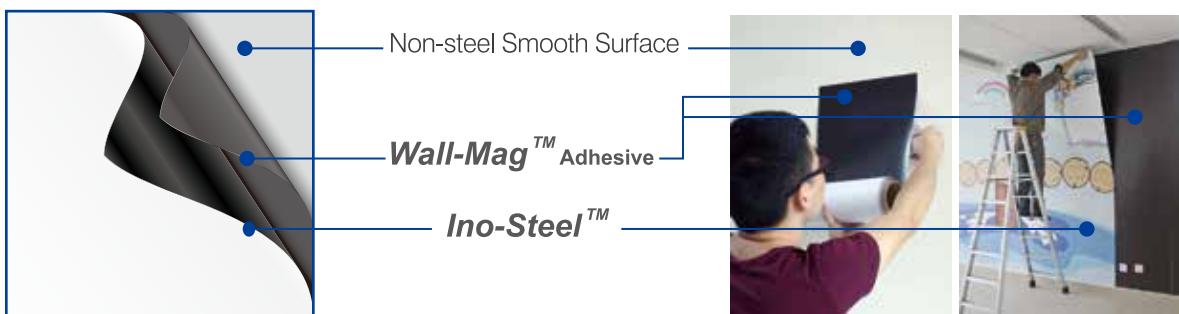

***Wall-Mag*TM** is magnetic material which perfectly applied to match ***Ino-Steel*TM** or other steel film.

***Wall-Mag*TM** Adhesive Magnet with adhesive has one side magnetized and other side with outdoor adhesive. We offer standard and high energy magnetic property.

***Wall-Mag*TM** 2 Sides mag Magnetized on both sides, with high energy magnetic property material.



NEWLIFE MAGNETICS

Distributed by:

 **Piedmont Plastics**[®]
where solutions take shape

Toll Free: 1.800.277.7898

www.piedmontplastics.com