



E339010

980054D




USE ANYWHERE SNAP 2

POWER SUPPLY

DEEP BOX UL listed

for Wet, Damp & Dry Locations

Accepts most 100 and 120 watt power sources

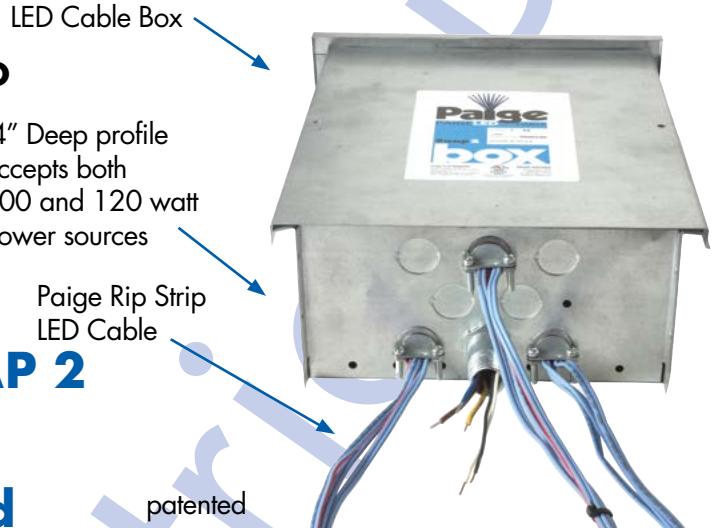

patented

1.0 SCOPE

1.1 This specification covers the transformer enclosure device "LED CABLE BOX" for use with LED Power supplies.

CONSTRUCTION

2.0 2.1 Material:

22 ga. Galvanized 2 piece box.

2.2 Inside Dimensions:

11.50" tall x 8.00" wide x 4" depth

2.3 Lower Shelf:

2.3.1 Eight pre-punched knock-outs.
2.3.2 One Predrilled hole for ground lug.

2.4 Inner Side Power Source

Receiving Channels:

2.4.1 Each Side has a spring loaded receiving channel.
2.4.2 Each channel will accommodate a single power source no larger than 9.00" tall x 3.125" wide x 2" deep.

2.5 Top of Sides and Bottom:

Pre-punched with air and condensation relief holes.

2.6 Front Cover:

Fastening holes centered so attachment can be made either direction

3.0 POWER SOURCE USAGE

3.1 Will accommodate one or two standard size and most 100 and 120 watt LED power sources.

4.0 SURFACE PRINT

4.1 Front Label, inside front cover installation instructions.

5.0

PACKAGING

5.1 10 to a case


5.2 Case size
17.5" x 13" x 17.75"

Anti-Corrosion Power Source Splice

12/24V DC LED Power Source

100/120V DC LED Power Source

Primary Wiring

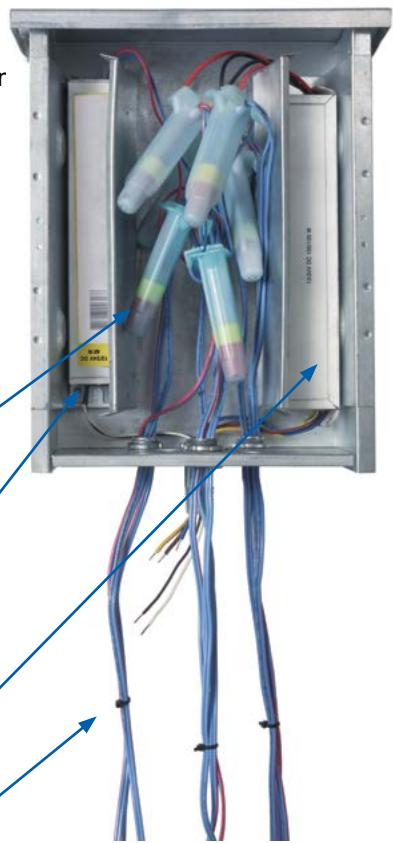

Rev 1 08/14/17

Distributed by:




Piedmont Plastics®

where solutions take shape

Toll Free: 1.800.277.7898

www.piedmontplastics.com

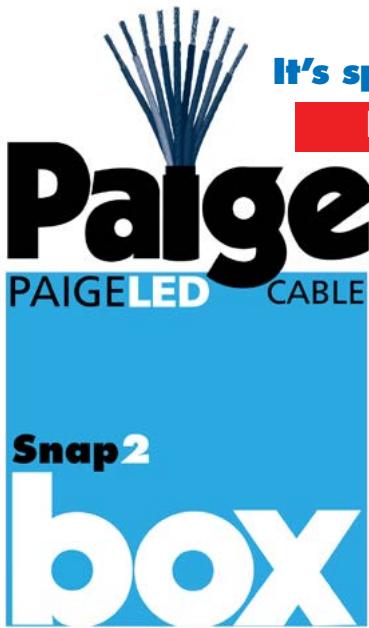

It's specifically designed for LED transformer applications

Deep enough to accommodate one or two standard size and most 100 and 120 watt LED power sources

Paige Electric is proud to introduce our new **SNAP 2**, class 2 power supply box. The **SNAP 2 design** brings added new advantages to both the sign installer and sign repair person. These new improvements incorporated with our previous system, makes the **SNAP 2** just the power supply box you want and need. With it's new deeper design can accommodate one or two standard size and most 100 and 120 watt LED power sources

The Paige **SNAP 2** is the **only** product that brings you all of the following features in one unit:



- One or two power sources can be installed.
- No screws are required to anchor the power sources to the box.
- Can be used indoors or outdoors.
- Faster installation in new sign installs.
- Faster replacements when maintenance is required.
- Easy to separate primary wiring (120/277 VAC) from secondary wires.
- Minimum of 6 secondary knock-outs, Plus 2 primary knock-outs.
- All class 2 power sources meeting the following maximum dimensions will fit; 3.125 inches wide x 2 inches deep x 9 inches long.
- Much larger choice of power sources that will fit.

It is just a snap!!!

Important Notice: We have been asked by many sign distributors to include a 1/2 inch diameter hole/knockout in the bottom of our units for the installation of a toggle switch disconnect. Paige cannot for safety reasons and NEC Code requirements.

First, the NEC requires that the disconnect be remote from the sign and the switch disconnect all nongrounding conductors simultaneously.

Second, all competitors using toggle switches have ignored the inherent fact that, when switched off, the primary wiring is still energized within the box making it extremely dangerous for someone who has switched off the toggle switch thinking it has disconnected the primary from the unit. It has only turned off the power to the power sources not the power to the box.

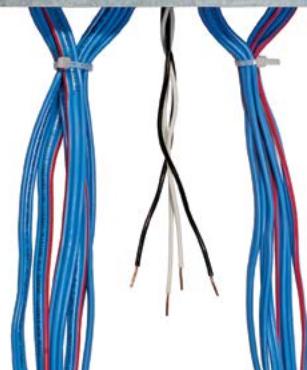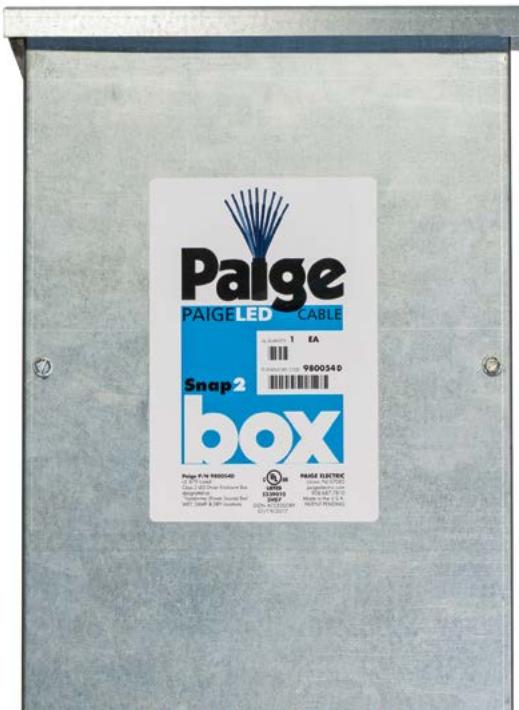

E339010

patented

Distributed by:



Piedmont Plastics®

where solutions take shape

Toll Free: 1.800.277.7898

www.piedmontplastics.com